



Light
is our passion

50W 0-10V 'Dim to Dark' LED Driver

Input characteristics

Input voltage AC	120-250V (ENEC) 120-277V (UL)
Input voltage DC	120-250V
Input current	0.7A max
Input frequency	50-60Hz
Efficiency @ full load	87%
Efficiency @ 2/3 load	≥84%
Power factor @ full load	>0.9C
THD @ full load	<20%
Inrush current	negligible: 30mA*s @ 277V
Surge protection	2kV DM, 2kV CM
Standby power	<0.5W

Output characteristics

LED output power	50W max
LED output current range	150-1,400mA. Settable.
LED output current resolution	programmable in 1mA steps
LED output current tolerance	+/- 5%
LED outputs	2 (UL Class 2)
LED output voltage range	1.5-55V

Control characteristics

Control channels	1
Dimming protocol	0-10V
Dimming range	100%-0%
Dimming curve	linear, logarithmic, square, soft-linear, or LightShape
LightShape	Dim to Warm, 2x pc-white
Dimming method	Hybrid HydraDrive
Driver configuration	with TOOLbox pro and FluxTool software
0-10V isolation	to line voltage input: 1500V to LED output: 3750V
0-10V current draw	0.6mA max

Product offering




SOLOdrive 561/A

P/N: SL0561A3

SOLOdrive AC, 50W, 0-10V, 1 control channel, constant current, 2x 55V outputs, square metal/plastic

Order number configuration - Standard

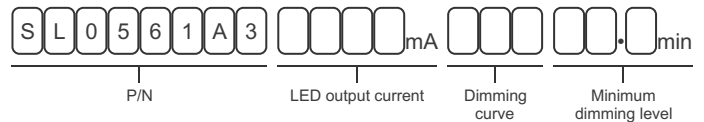


P/N: LED driver part number.

LED output current: in 1mA steps, e.g. "0258", "1011", etc.

Dimming curve: enter "LOG" for logarithmic (default), "LIN" for linear, "SQU" for square or "SLN" for a soft-linear dimming curve.

Minimum dimming level: write to one decimal place, e.g. "05.0" for 5%, "07.5" for 7.5%, "10.1" for 10.1%, etc. Leave blank if default minimum dimming level (0.1%) is required.

Order number configuration - LightShape

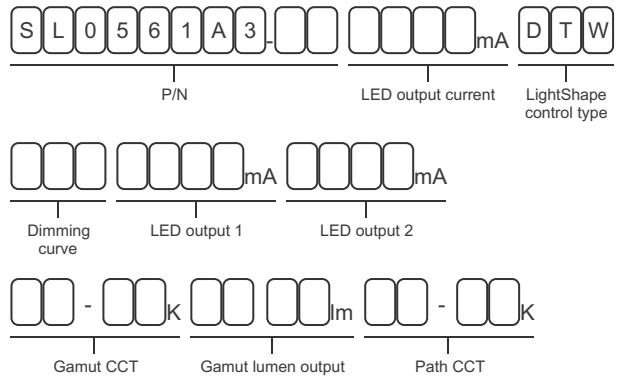


LED output current	Output current identical for all outputs? Enter value in 1mA increments, e.g. "725" for 725mA and leave the fields "LED output 1" and "LED output 2" blank. Output current different per output? Enter "MCUR" in LED output current and specify the differing currents in LED output 1/2.
LightShape control type	"DTW" stands for Dim to Warm
Gamut CCT	LightShape-specific option. Enter the LEDs' CCT as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57 and 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2.
Gamut lumen output	Enter the lumen output range for LED output 1 and 2 as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available range per output: from "01" for 100lm to "99" for 9900lm. E.g. "10-12" for 1000lm on LED output 1 and 1200lm on LED output 2.
Path CCT	Leave blank if Path CCT requires the same values as Gamut CCT. Or specify the Path CCT values as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57, 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2.

Dimensions, weight and packaging

SOLOdrive 561/A

LxWxH	152.5x76.2x30.1mm
Weight	302 g
Items per carton	45 pcs



Standards and certifications

Standards compliance

EN	61347-1/-2-13, 62384, 55015, 55022, 61000-3-2, 61547
UL, Recognized Component	UL 1310, UL 8750 (Class 2 output)
FCC	47 CFR Part 15 class B
RoHS2	

Certifications



Wiring Specifications

Wire type	AWG 20-16, 0.5-1.5mm ² solid or stranded copper
Wire strip length	9mm

Wiring diagram

SOLOdrive 561/A



- LED output
- LED output
- LEDcode / NTC
- 0-10V
- 120-277 VAC

Thermal protection

External NTC thermistor	throttling @ 70 °C (settable)
External thermistor value	47kΩ
Recommended thermistors	238164063473 (leaded) NTCASCWE3473J (screw)

Thermal specification

Ta operating range	-20 °C ... +50 °C
Tc max	83 °C
Tc lifetime	76 °C
Lifetime @ Tc lifetime	50,000 hours

Protection

LED output short	yes
Overload	yes
Reverse polarity	yes, for LED output
Restart after protection	yes

Warranty

Warranty period	3 years
-----------------	---------